

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 September 2004 (16.09.2004)

PCT

(10) International Publication Number
WO 2004/079861 A1

(51) International Patent Classification⁷: **H01Q 3/04**,
3/08, 21/06, 3/26, 3/30

(21) International Application Number:
PCT/BG2004/000003

(22) International Filing Date: 8 March 2004 (08.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
107620 6 March 2003 (06.03.2003) BG

(71) Applicant (for all designated States except US): **RAYSAT
CYPRUS LIMITED** [CY/CY]; Poseidonos 3, Emergo
House, P.C. 2406 Nicosia (CY).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOYANOV, Victor**


[BG/BG]; z.k.Liulin, bl.518, entr.B, app.61, 1359 Sofia (BG). **MARINOV, Borislav** [BG/BG]; z.k. Nadezha, bl. 115, entr.3, app.55, 1220 Sofia (BG). **KAMENOPOLSKI, Stanimir** [BG/BG]; 3 Krum Kiuliavkov Str., bl. 64, entr.3, app.61, 1172 Sofia (BG). **POPOVA, Mariya** [BG/BG]; z.k.Suha reka, bl. 22A, entr.B, app.107, 1517 Sofia (BG). **SLAVKOV, Ivaylo** [BG/BG]; z.k. Ovcha kupel 2, bl.7, entr.4, app.45, 1632 Sofia (BG). **LYUBENOV, Georgi** [BG/BG]; z.k.Liulin, bl. 333, entr.1, app.39, 1336 Sofia (BG). **TRAYKOV, Rossen** [BG/BG]; z.k.Mladost 2, bl. 233, entr.3, app.8, 1799 Sofia (BG).

(74) Agent: **LEKOVA, Tatyana**; 136 Hristo Botev Blvd., 1202 Sofia (BG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

[Continued on next page]

(54) Title: **FLAT MOBILE ANTENNA SYSTEM**

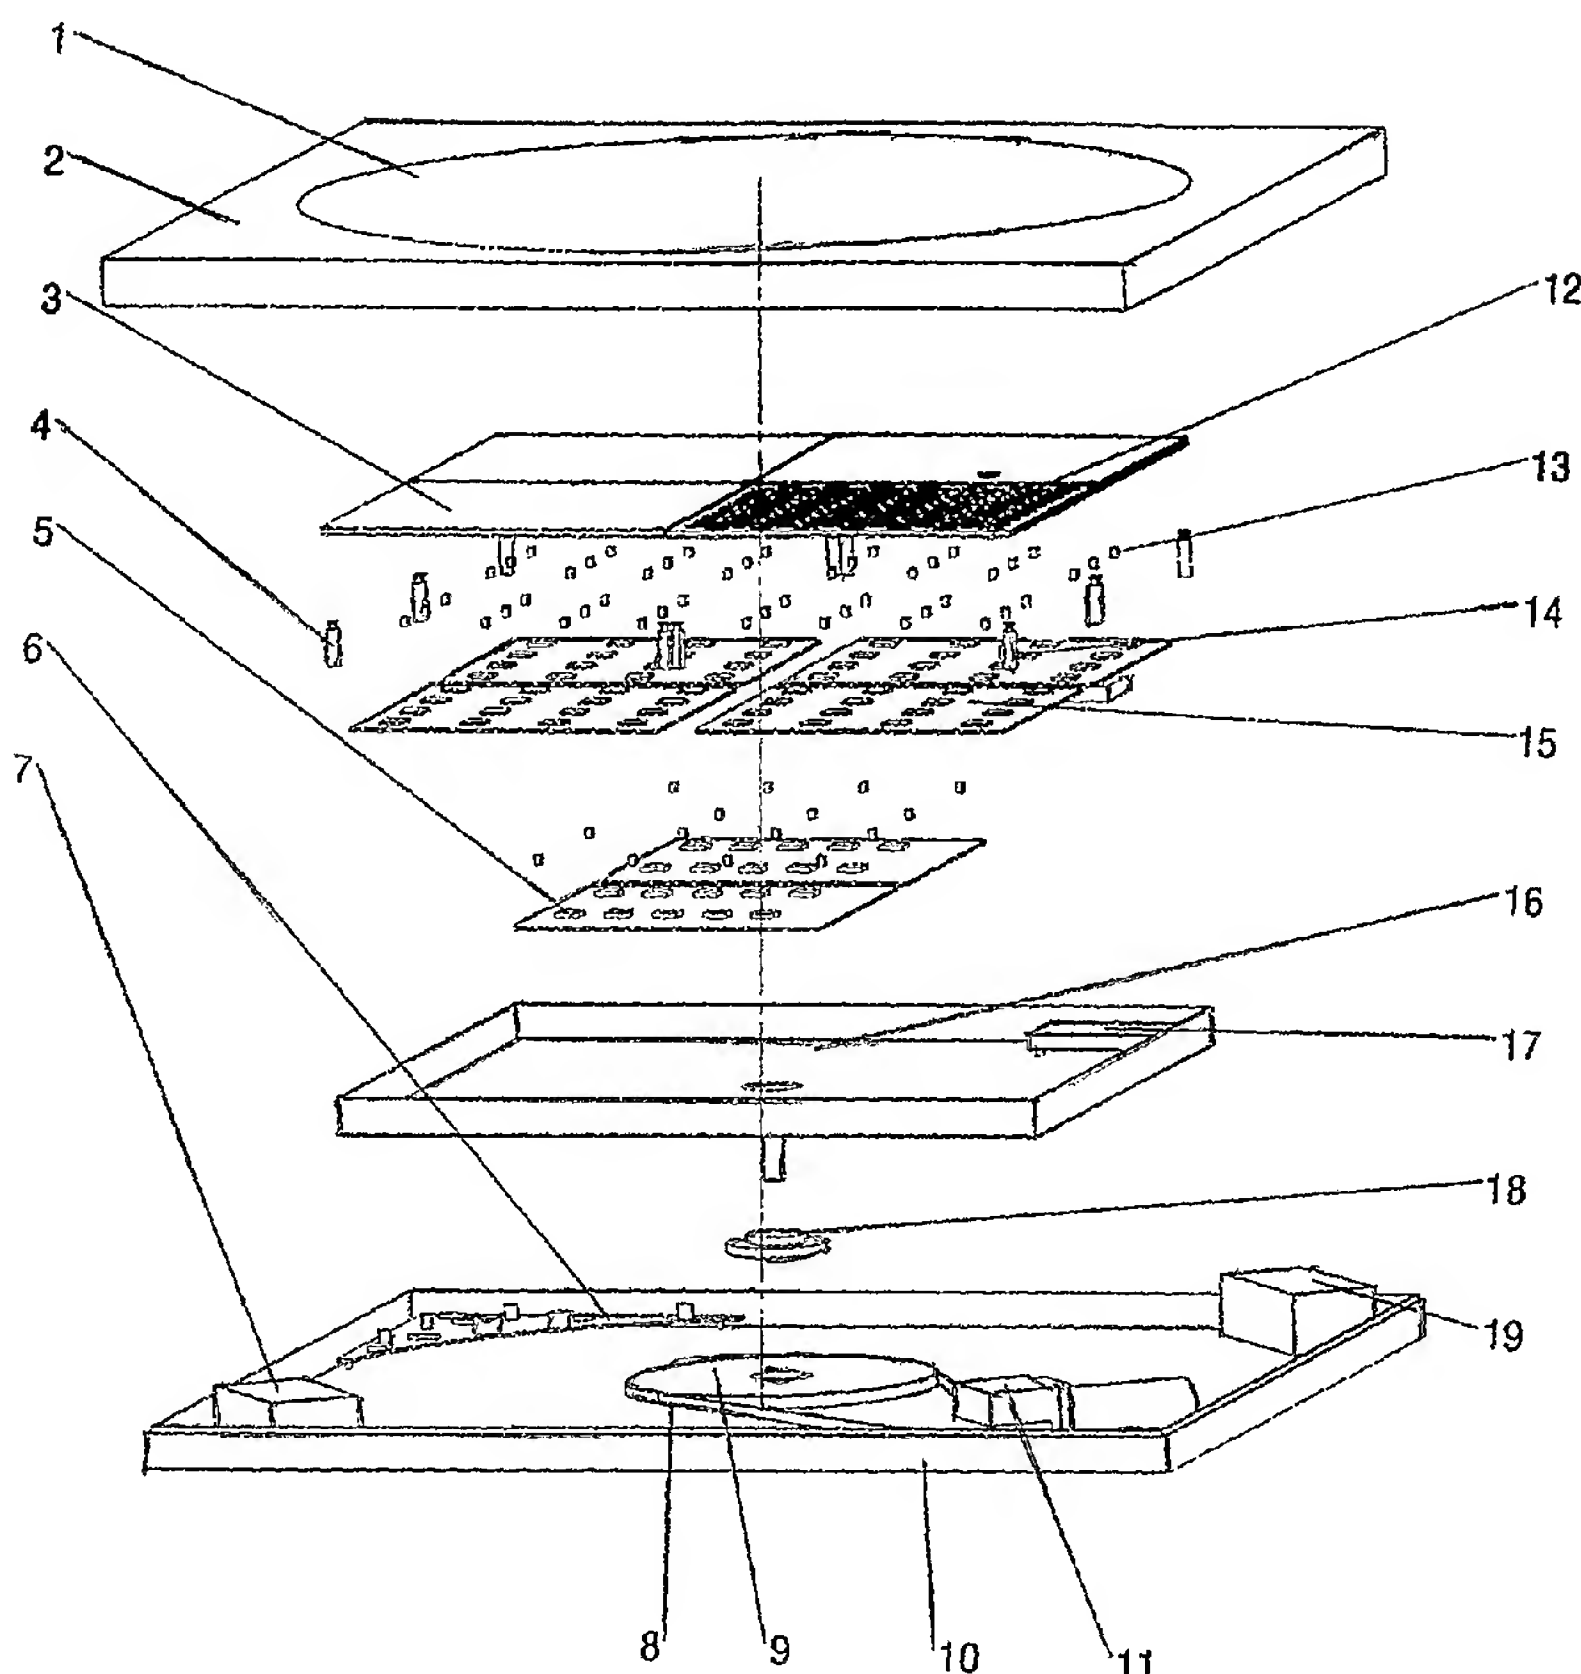

(57) Abstract: Mobile antenna system comprising rotary part by azimuth, which is an electronically steered in elevation phase array antenna, comprising: plurality of (multi)layered structures, placed at certain levels, said structures include microstrip antenna elements (12), feeding lines (20), which properly combined and guide the electromagnetic energy, forming the necessary phase and amplitude distribution over the antenna elements, a plurality of electronic modules (28) providing amplification, phase change, frequency conversion and steering of the received signal, power supply and control circuits for the same electronic modules; a plurality of vertical transitions (13), providing the passing of the electromagnetic energy between the layered structures from different levels; frequency converting device and rotary joint (18), passing the received signal, the power supply and control circuits to the static part; sensors detecting the spatial movement of the system, and power supply and control units; static part, comprising bottom (10), cover (2) with radiotransparent part (1), mechanical supports, motor (11), gear, plurality of electronic modules (19, 6, 7).



KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FLAT MOBILE ANTENNA SYSTEM

Field of the invention

The presented invention concerns a flat antenna system, which could be
5 used on moving vehicles and platforms to receive TV, Internet and other
communication signals broadcasted from satellites.

Prior Art

The known mobile satellite antenna systems are with mechanical,
10 electronic or combined – electro-mechanical tracking. The systems with purely
mechanical tracking use directed antennas which are rotated mechanically
toward the satellite direction, while these with electronic tracking form a
directional radiating pattern in the needed direction. A suitable variant is to
combine the mechanical tracking in azimuth plane with electronic tracking in
15 elevation of the satellite.

Disadvantage of the known mobile antenna systems with combined
electronic and mechanical tracking is that they have relatively big dimensions
especially in height, what makes their use difficult on some types of vehicles, for
instance passenger cars. Another drawback of these systems is their
20 complicated structure, ensuring the necessary parameters of the system,
however, in turn, resulting in comparatively high price.
From US patent № 6,034,6 a solution is known, similar to the presented
embodiments, which includes mechanical steering in azimuth and electronic
tracking in elevation. The patent describes an antenna used in terminals working
25 with LEO satellites comprising elevating platform, mounted so as to be able to be
rotated accurately around a transverse to the rotational platform axis, which is
rotated around a central axis. A plurality of antenna elements, forming a phased
array antenna, are mounted on the elevating platform and have tracking plane
parallel to and passing through the transverse axis of the elevating platform.

- 2 -

The antenna can be steered mechanically and electronically, and is used for switching from one to other LEO satellite by positioning of the elevating platform of the antenna with the perpendicular to its surface directed between the two satellites, so that the tracking plane of the antenna passes through the two
5 satellites. At the moment of switching the antenna beam is electronically directed from one satellite to the other without loss of any communication data during this process.

Disadvantage of the solution is the necessity of additional mechanical tilting in elevation plane leading to further increase of the height of the system.

10 Other similar solution is shown in US patent № 5,886,671, where fully electronic steering is realized, which makes the structure more complicated and more expensive. The phased array antenna includes waveguide structure with a plurality of waveguides. The waveguide structure distributes the received or transmitted electromagnetic signals through the plurality of waveguides to a
15 corresponding module of the active phased array, which amplifies and tunes the phase of the receiving signal. The active phased array modules are connected to an internal interconnecting structure, which provides paths for the signals to pass through, and paths for the supply and digital signals from and to the active phased array modules. The internal interconnecting structure and the waveguide
20 structure are mounted to the platform to form a stable unit, so that the electronic modules to be supported in a predefined position with respect to the corresponding waveguides. The platform also contains waveguides for distribution of the electromagnetic signals from the internal interconnecting structure to the output of the antenna. Each active array module includes
25 polarizing element for switching between left-hand and right-hand polarization. The polarizing element, the amplifiers and the phase control devices are mounted on a substrate in every active array module, while the substrate is

- 3 -

mounted perpendicularly to the direction of the propagation of the signals in the corresponding waveguides which ensures the flat structure of the antenna.

From US patent № 5,835,057 a solution is known with fully mechanical tracking which uses a directed antenna with non-steering diagram.

5 The patent describes a mobile satellite communication system including an antenna assembly mountable on a vehicle and a satellite tracking assembly. The antenna assembly includes an antenna device for receiving first satellite signals from a first satellite in a first frequency band and for transmitting and receiving second satellite signals to and from a second satellite in a second
10 frequency band, and a drive subassembly for rotating the antenna device relative to the vehicle in response to a control signal. The satellite tracking assembly maintains the antenna device pointed at the first and second satellites as the vehicle moves. The system further includes a receiver coupled to the antenna device for receiving the first satellite signals and a transceiver coupled to the
15 antenna device for transmitting and receiving the second satellite signals

Main drawback of such solution is the impossibility to build the system with low profile.

Summary of the invention

20 Objective of the presented invention is to create a mobile antenna system with simplified structure and minimized height, which provides the necessary properties for satellite receiving and tracking.

According to the invention the objective is accomplished with mobile antenna system comprising:

25 a part rotating by azimuth, representing an electronically steered in elevation phased array antenna, characterized by comprising:

a plurality of (multi)layered structures, placed at certain levels, comprising microstrip antenna elements, feeding lines, which appropriately combine and

- 4 -

guide the electromagnetic energy, forming the necessary phase and amplitude distribution over the antenna elements, a plurality of electronic modules providing amplification, phase change, frequency conversion and steering of the received signal, power supply and control circuits for the same electronic modules;

5 a plurality of vertical transitions, providing the passing of the electromagnetic energy between the layered structures from different levels;

frequency converting device and rotary joint, passing the received signal, the power supply and control circuits to the static part;

10 sensors for detecting the spatial movement of the system, and power supply and control units;

static part, comprising bottom, cover with radiotransparent part, mechanical supports, motor, gear, plurality of electronic modules;

In a preferred embodiment the first layered structure forming the first level comprises the micro strip antenna elements.

15 In other preferred embodiment the microstrip antenna elements are cavity backed.

In other preferred embodiment the microstrip antenna elements are dual port.

In a preferred embodiment the microstrip antenna elements are probe fed.

20 In other preferred embodiment the microstrip antenna elements are slot fed.

In other preferred embodiment the microstrip antenna elements are tilted to the observation angle.

25 In other preferred embodiment the microstrip antenna elements are covered with dielectric layer, which could act as impedance matching for low elevation tracking.

In other preferred embodiment the dielectric layer could carry the antenna elements.

30 In other preferred embodiment the antenna elements are placed in a lattice formed from the peaks of isosceles triangles.

- 5 -

In a preferred embodiment the electronic tracking is in one plane perpendicular to the rows formed from one of the sides of the triangles, which form the lattice.

5 In other preferred embodiment the antenna elements placed in the rows, perpendicular to the electronic tracking plane, are placed at optimal distance regarding the effective utilization of the antenna aperture and feeding lines density.

In other preferred embodiment the antenna elements are placed apart in certain places of the array in order to place mechanical supports there.

10 In other preferred embodiment the first layered structure comprises feeding lines, which feed sequentially several antenna elements from one and the same row.

15 In other preferred embodiment the first layered structure comprises feeding lines, which feed in sequence and in parallel several antenna elements from one and the same row.

In other preferred embodiment the first layered structure comprises feeding lines, which feed in sequence and in parallel several antenna elements from neighboring rows providing constant phase difference between them.

20 In other preferred embodiment the levels are formed from more than one similar layered structure, so as to form a plurality of leveled modules, which are united from the lower levels.

In other preferred embodiment the leveled modules could be tilted to the direction of observation.

25 In other preferred embodiment the first layered structure is formed from vertically placed layers.

In other preferred embodiment the first layered structure contains low noise amplifiers.

30 In other preferred embodiment the next layered structure contains feeding lines, combining the groups from the first level and from one and the same row in parallel.

- 6 -

In other preferred embodiment the next layered structures contain amplifiers.

In other preferred embodiment the last layered structure also contains phase control devices.

5 In other preferred embodiment the last layered structure contains amplitude control devices.

In other preferred embodiment the phase control devices are integrated circuits.

10 In other preferred embodiment the phase control devices are built from discrete components.

In other preferred embodiment the last layered structure contains feed lines, forming circuit, which combines parts from the different rows.

In other preferred embodiment the last layered structure contains a plurality of digital control units for steering of amplitude and phase control units.

15 In a preferred embodiment the feed lines in the layered structures are microstrip lines.

In a preferred embodiment the feed lines in the layered structures are strip lines.

20 In a preferred embodiment at least some of the layered structures are multilayer printed circuit boards.

In a preferred embodiment at least some of the layered structures are fulfilled as equal modules containing one or more levels, united from the next level of layered structure.

25 In a preferred embodiment the connection between the feed lines from the separated levels is provided from plurality of vertical RF transitions.

In another preferred embodiment the vertical RF transitions are coaxial elements, capable for surface mounting.

In another preferred embodiment the vertical RF transitions are stripline elements, capable for surface mounting.

- 7 -

In another preferred embodiment the vertical RF transitions have supporting mechanical functions.

In another preferred embodiment one side of the layered structures is covered with electromagnetic absorptive coating.

5 In another preferred embodiment the RF outputs from the layered structure of the last level are connected through coaxial cables to a separate combiner.

In another preferred embodiment the output of the said combiner is connected with the input of the frequency converter.

10 In another preferred embodiment the leveled structure is covered with cover, which is an electromagnetic shield.

In another preferred embodiment the cover has electromagnetic absorptive coating from the inner side.

15 In another preferred embodiment the cover has supporting and carrying functions.

In another preferred embodiment the cover is mounted to the static part through rotary joint.

In another preferred embodiment the cover comprises mounted from beneath gear, passing the movement from the motor.

20 In another preferred embodiment the said gear is made as crown, around the periphery of the cover of the rotary part.

In a preferred embodiment the driving is provided by belt gear.

25 In a preferred embodiment the cover of the antenna system has radiotransparent part, which in a variant could have impedance matching properties for lower elevation tracking.

In a preferred embodiment the system has satellite signals reading and recognition unit.

30 The advantages of the antenna system according to the invention are its simplified from a technological point of view structure, giving an opportunity for realization of a system with low height, easier and cheaper production. The

- 8 -

leveling of the structure allowed the feeding lines to be distributed in height, providing closer placement of the neighboring rows of antenna elements, which is extremely critical for the tracking parameters. On the other hand, the possibilities are avoided for mutual influence between long sequentially fed parts
5 from the feeding lines, which minimizes the uncertainty of the phases, mutual coupling, possibility for blindness effect, etc.

Brief description of the drawings

Figure 1 shows exploded view of a preferred embodiment of the system.

10 Figure 2 shows cross-section of preferred embodiments of the antenna system.

Figure 3 shows preferred embodiments of the antenna elements.

Figure 4 shows preferred embodiments of the feeding lines of the first level.

15 Figure 5 shows preferred embodiments of the vertical transitions.

Figure 6 shows cross section of a preferred embodiment of the antenna using vertical modules.

20 Detailed description of the preferred embodiments

The Antenna system includes rotary and static parts. The static part is the box of the system, comprising bottom 10 (FIG.1), cover 2, with radiotransparent part 1, microprocessor control unit 6, motor with motor controller 11, belt gear 8, providing the necessary properties of the driving, power supply module 7 and
25 satellite recognition module 19. The rotary part is a steerable phased array, which is rotated in the horizontal plane around its geometric center, while with the steering of the rotation the azimuth tracking of the receiving signal is provided. The elevation tracking is provided electronically. The tracking is done according to a special algorithm, using information about the strength of the receiving signal
30 and the spatial movement of the antenna array. The rotary part is comprised of a

- 9 -

plurality of layered structures 3,5,15 (FIG. 1), building separate levels and including microstrip antenna elements 12, feeding transmission lines 20 (FIG. 4), which carry and combine the received from the antenna elements 12 signal in a suitable way according to the structure, so as to ensure the needed phase and amplitude relation between the antenna elements. On the corresponding levels several low noise amplifying stages 21 for each row are built, while the number and their places are selected with regard to ensuring the overall amplification and noise figure. On the last level of the structure phase control stages are placed, which provide the dynamic steering of the tracking beam. The layered structures consist of power supply lines and digital control circuits for the phase control devices. The RF signal is passed through the different levels of the structure through vertical RF transitions 13, especially developed as SMT components. Frequency converting module, transferring the signal on intermediate frequency, digital control of the phase control devices, and sensors for detection of the spatial movement around three geometric axes are also placed on the rotary part. The mounting to the static part is provided through rotary joint 18, which comprises rotating electrical contacts for control signals circuits, power supply and coaxial RF transition. The microstrip antenna elements 12 are placed on the upper side of the layered structures of the first floor. They are placed in cavities 21 (FIG. 3b), made in one of the layers of the layered structure 3, in order to assure lower mutual coupling between the elements, thus avoiding many harmful effects, deteriorating the parameters of the antenna during tracking with relatively low elevation angles. On the other hand, such antenna elements have lower profile and good efficiency, because they are air filled. The antenna elements have two inputs, providing all necessary polarizations, which makes the system universal. The feeding is passed with probes 22 (FIG. 3a), which provides good efficiency, while occupying minimum space on the feeding layer. Thus, maximum density of the elements and more space for the feeding lines are provided. It is possible to implement capacitive coupled probe fed elements, so that the feeding lines will be decoupled for DC and respectively the number of the decoupling

- 10 -

components in the amplification stages 28 will be reduced. A preferred embodiment is shown on FIG. 3a, where the capacitive coupling is realized with the slot 27. Other embodiment which could save technological operations, is to feed the antenna elements only through slot 26 (FIG.3b), which could be realized
5 using some space occupied by the feeding lines on the first level. In order to improve the scanning and covering of lower elevation angles the antenna elements could be tilted towards the direction of the tracking (FIG. 3d) with more complicated configuration of the layer forming the cavities. The antenna elements are covered with thin matching layer 23, which acts as impedance matching layer
10 for scanning with small elevation angles. From array point of view the elements are arranged in a lattice of isosceles triangles (29), and the distance between them is selected according to the pattern requirements for covering lowest elevations. The direction of the electronic tracking is perpendicular to one of the sides of the triangles. The distance between the elements placed along the same
15 side could be optimized in respect to element number and overall occupied area. There are particular places of the array with larger spaces, provided for mechanical support of the separate structures. From structural point of view some of the said leveled structures are built as separate equal modules, united from their bottom level. The feeding lines 20, placed on the first level 3, combine
20 sequentially the signal from corresponding inputs of several antenna elements 12, placed along the rows (30), perpendicular to the direction of the electronic tracing, forming basic groups from passively combined elements. Furthermore, two of the said groups are connected in parallel and the signal is passed through vertical RF transition 13 (FIG. 4a) to the next level, where the first amplification is
25 realized. It is possible to combine more than two groups of sequentially fed elements, as in one embodiment (FIG. 4c) they could be from neighboring rows with corresponding phased difference implemented. With proper placement of the feeding lines the first amplification stage could be realized on the first level (FIG. 4b), as in this way the losses and the noise of the system are minimized.
30 The first two levels 3,15 (FIG. 1) are built from four modules 25 (FIG. 2a), united

- 11 -

two by two with the layer underneath 5, thus building two larger modules. In a preferred embodiment it is possible for so built modules to be tilted towards the direction of tracking in order to improve the tracking to lower elevation angles. In another embodiment (FIG. 6) the feeding lines from several layers (3, 15) could be routed on vertical layers 3, united from the last level 5, while each row of the array has it's own layered structure.

On the last level 5 parallel combining of the received signals by rows is realized, as well as the necessary number of amplification stages. The phase controlling stages, which steer the polarization and the elevation angle of the system are also placed there. For each row two phase control devices are provided, so that the number could be reduced with reduction of the number of the needed polarization to two circular or two linear. The phase control stages are standard phase shifting devices fulfilled as integrated circuits, but could be realized with discrete components. The outputs of the phase control devices of the corresponding structures are combined with combining circuit, formed by feeding lines with one output. They are digitally controlled from specially provided units connected with the CPU unit. The feeding lines are realized as microstrip lines on suitable substrates, while their material and thickness defines the density of the feed lines, which defines the number of the levels, and, hence, the complexity of the overall structure. In order to place the feed lines with higher density, a part of them could be realized as striplines, built as internal layers of the layered structures, using appropriate RF transitions. In essence, the said layered structures are printed circuit boards, fulfilled by standard technology. The assembling and mounting of all components is standard, as in most of the cases when SMT technology is used.

The separate levels are connected with a plurality of vertical RF transitions (FIG. 1,2,5), which pass the signal of the feed layers from level to level, as well as with the necessary number of mechanical supporting elements. The vertical transitions are developed for the particular application as coaxial transmission line or stripline. At one of their sides they are arranged for SMT

- 12 -

mounting, and on the other side they have leads for passing through metalized through holes of the corresponding structure and are soldered to it.

The RF outputs of the structures from the last level 5 are united through coaxial cable in a final RF combiner, fulfilled as a separate module. From it the signal is passed to a frequency converter where it is transferred to an intermediate frequency and is passed to the output of the antenna through a module for receiving and recognition of the satellite signals.

The whole rotary part is enclosed by cover 10, which has supporting function, and provides electromagnetic shielding as well. Additionally, radio-absorptive layer is placed on the cover and the layered structures, which reduces the parasitic propagation of electromagnetic energy between the feeding lines. In the middle of the cover rotary joint 18 is mounted, comprising sliding joints, connecting the power supply circuit and these for the digital control, as well as coaxial rotary joint passing the RF signal.

On the bottom of the cover is mounted a specially built low profile tooth wheel, which is meshed with the driving belt and together with the gear ensures the necessary gear ratio of the driving. In a preferred embodiment this wheel could be fulfilled as crown, around the covers periphery, further reducing the antenna profile.

The antenna system acts as follows:

The electromagnetic signal, broadcasted from the satellite, is received by the antenna elements from the first level of the antenna system, after which it is carried and combined through the feeding lines, and on certain places amplifier stages are implemented, which ensures the necessary ratio of amplification/noise of the system. The combining is done basically in rows up to the phase control modules, and after them the rows are combined to one output for each module. The whole structure of feeding lines is with strictly controlled phase and amplitude ratios, which ensures quality steering of the tracking direction. The control of the phase control modules is fulfilled by a CPU unit, which provides software control of the tracking based on the measuring of the received signal

- 13 -

and spatial movement sensors. This unit also performs the steering of the mechanical rotation of the rotary part, ensuring the tracking in azimuth plane.

Application of the invention

The antenna system according to the invention is applicable in cases,
5 when low profile mobile antenna is necessary for receiving satellite signals with different polarization on moving platform. The antenna system can work with conventional satellite receiver, while the steering could be realized by the receiver or from a separate control unit. The system can provide all contemporary services, broadcasted through GEO satellite, including digital TV
10 reception or other equivalent digital data transfer. The high density of the rows ensures low elevation angles, which makes the system usable with equal success in wide geographic regions, for instance, the whole territory of the USA or Europe.

- 14 -

PATENT CLAIMS

1. Mobile antenna system comprising rotary part by azimuth, which is an electronically steered in elevation phased array antenna, comprising:

plurality of (multi)layered structures, placed at certain levels, said

5 structures include microstrip antenna elements (12), feeding lines (20), which properly combine and guide the electromagnetic energy, forming the necessary phase and amplitude distribution over the antenna elements, a plurality of electronic modules (28) providing amplification, phase change, frequency conversion and steering of the received signal, power supply and control circuits
10 for the same electronic modules;

a plurality of vertical transitions (13), providing the passing of the electromagnetic energy between the layered structures from different levels;

frequency converting device and rotary joint (18), passing the received signal, the power supply and control circuits to the static part;

15 sensors detecting the spatial movement of the system, and power supply and control units;

static part, comprising bottom (10), cover (2) with radiotransparent part (1), mechanical supports, motor (11), gear, plurality of electronic modules (19,6,7);

20 2. Mobile antenna system according to claim 1, featuring first layered structure (3), forming the first level, which comprises the microstrip antenna elements (12)

3. Mobile antenna system according to claim 2, characterized by microstrip antenna elements (12) placed in cavity (21).

25 4. Mobile antenna system according to claim 1, 2 or 3, characterized by microstrip antenna elements which are dual-port.

5. Mobile antenna system according to one of claims 1 to 4, characterized by microstrip antenna elements (12) which are probe fed (22).

30 6. Mobile antenna system according to claim 5, characterized by microstrip antenna elements (12), which are capacitive probe fed (22,27).

- 15 -

7. Mobile antenna system according to one of claims from 1 to 4, characterized by microstrip antenna elements (12) fed through slot (26).

8. Mobile antenna system according to claim 1, characterized by microstrip antenna elements (12) which are tilted to the observation angle.

5 9. Mobile antenna system according to claim 1, characterized by microstrip antenna elements (12) covered with dielectric layer, which could act as impedance matching for low elevation tracking.

10 10. Mobile antenna system according to claim 9, characterized by a dielectric layer carrying the antenna elements (12).

11. Mobile antenna system according to claim 1, characterized by microstrip antenna elements (12) placed in a lattice formed from the peaks of isosceles triangles (29).

15 12. Mobile antenna system according to claim 1, characterized by electronic tracking which is in one plane perpendicular to the rows (30) formed by one of the sides of the triangles (29), which form the lattice.

13. Mobile antenna system according to claim 12, characterized by antenna elements placed in the rows, perpendicular to the electronic tracking plane, which (elements) are placed at optimal distance regarding the effective utilization of the antenna aperture and feeding lines density (20).

20 14. Mobile antenna system according to claim 1, characterized by microstrip antenna elements (12) which are placed apart at certain places of the array in order to place mechanical supports (14) there.

25 15. Mobile antenna system according to claim 1, characterized by a first layered structure (3) comprising feeding lines (20), which feed sequentially several antenna elements (12) each, from one and the same row.

16. Mobile antenna system according to claim 1, characterized by a first layered structure (3) containing feeding lines (20), which feed in sequence and in parallel several antenna elements (12) each, from one and the same row.

30 17. Mobile antenna system according to claim 1, characterized by first layered structure (3) comprising feeding lines (20), which feed in sequence and

- 16 -

in parallel several antenna elements (12) from neighbouring rows providing constant phase difference between them.

18. Mobile antenna system according to claim 1, characterized by levels which are formed by more than one similar layered structures (3,15), so as to
5 form a plurality of leveled modules (25), which are united from the lower levels.

19. Mobile antenna system according to claim 18, characterized by leveled modules, which could be tilted to the direction of observation.

20. Mobile antenna system according to claim 1, characterized by first layered structure (3) which is formed by vertically placed layers(31).

10 21. Mobile antenna system according to claim 1, characterized by first layered structure (3), which contains low noise amplifiers (28).

22. Mobile antenna system according to claim 21, characterized by next layered structures (15,5) which contain feeding lines (20), combining the groups from the first level and from one and the same row in parallel.

15 23. Mobile antenna system according to claim 22, characterized by next layered structures (15,5) also containing amplifiers (28).

24. Mobile antenna system according to claim 23, characterized by last layered structure (5) containing phase control devices.

20 25. Mobile antenna system according to claim 24, characterized by last layered structure (5) which also contains amplitude control devices.

26. Mobile antenna system according to claim 24, characterized by phase control devices which are integrated circuits.

27. Mobile antenna system according to claim 24, characterized by phase control devices which are build from discrete components.

25 28. Mobile antenna system according to claim 1, characterized by last layered structure (5) that contains feed lines (20), forming circuit, which combines parts from the different rows.

30 29. Mobile antenna system according to claim 24, characterized by last layered structure (5) which contains plurality of digital control units for steering of amplitude (28) and phase control units.

- 17 -

30. Mobile antenna system according to claim 1, characterized by feed lines (20) in the layered structures (3,5,15) which are in fact microstrip lines

31. Mobile antenna system according to claim 1, characterized by part of the feed lines (20) in the layered structures (3,5,15) which are strip lines.

5 32. Mobile antenna system according to claim 1, of which it is characteristic that at least some of the layered structures (3,5,15) are multilayer printed circuit boards.

10 33. Mobile antenna system according to claim 1, of which it is characteristic that at least some of the layered structures (3,5,15) are fulfilled as equal modules containing one or more levels, united from the next level of layered structure.

34. Mobile antenna system according to claim 1, characterized by the connection between the feed lines (20) from the separated levels (3,5,15) is provided by a plurality of vertical RF transitions (13).

15 35. Mobile antenna system according to claim 34, characterized by vertical RF transitions (13) which are coaxial elements, capable of surface mounting.

36. Mobile antenna system according to claim 34, characterized by vertical RF transitions (13) which are stripline elements, capable of surface mounting.

20 37. Mobile antenna system according to claim 34, 35 or 36, characterized by vertical RF transitions (13) which have supporting mechanical functions.

38. Mobile antenna system according to claim 1, of which it is characteristic that one side of the layered structures (5,15) is covered with electromagnetic absorptive coating.

25 39. Mobile antenna system according to claim 1, of which it is characteristic that the RF outputs from the layered structure (5) of the last level are connected through coaxial cables to a separate combiner.

30 40. Mobile antenna system according to claim 39, of which it is characteristic that the output of the said combiner is connected with the input of the frequency converter.

- 18 -

41. Mobile antenna system according to claim 1, characterized by leveled structure covered with cover (16), which cover is an electromagnetic shield.

42. Mobile antenna system according to claim 41, of which it is characterized by that the cover (16) has electromagnetic absorptive coating from
5 the inner side.

43. Mobile antenna system according to claim 41 или 42, of which it is characterized by that the cover (16) has supporting and carrying functions.

44. Mobile antenna system according to claim 41, of which it is characterized by that the cover (16) is mounted to the static part through rotary
10 joint (18).

45. Mobile antenna system according to claim 41, of which it is characterized by that the cover (16) comprises mounted from beneath gear (9), passing the movement from the motor (11).


46. Mobile antenna system according to claim 45, of which it is
15 characterized by that the said gear (9) is made as crown, around the periphery of the cover (16) of the rotary part.

47. Mobile antenna system according to claim 1, of which it is characterized by that the driving is provided from belt gear (8).


48. Mobile antenna system according to claim 41, of which it is
20 characteristic that the cover (2) of the antenna system has radiotransparent part (1).

49. Mobile antenna system according to claim 48, of which it is characterized by that the radiotransparent part (1) has impedance matching properties for lower elevation tracking.


50. Mobile antenna system according to claim 1, of which it is
25 characterized by that the system has satellite signals reading and recognition unit (19).

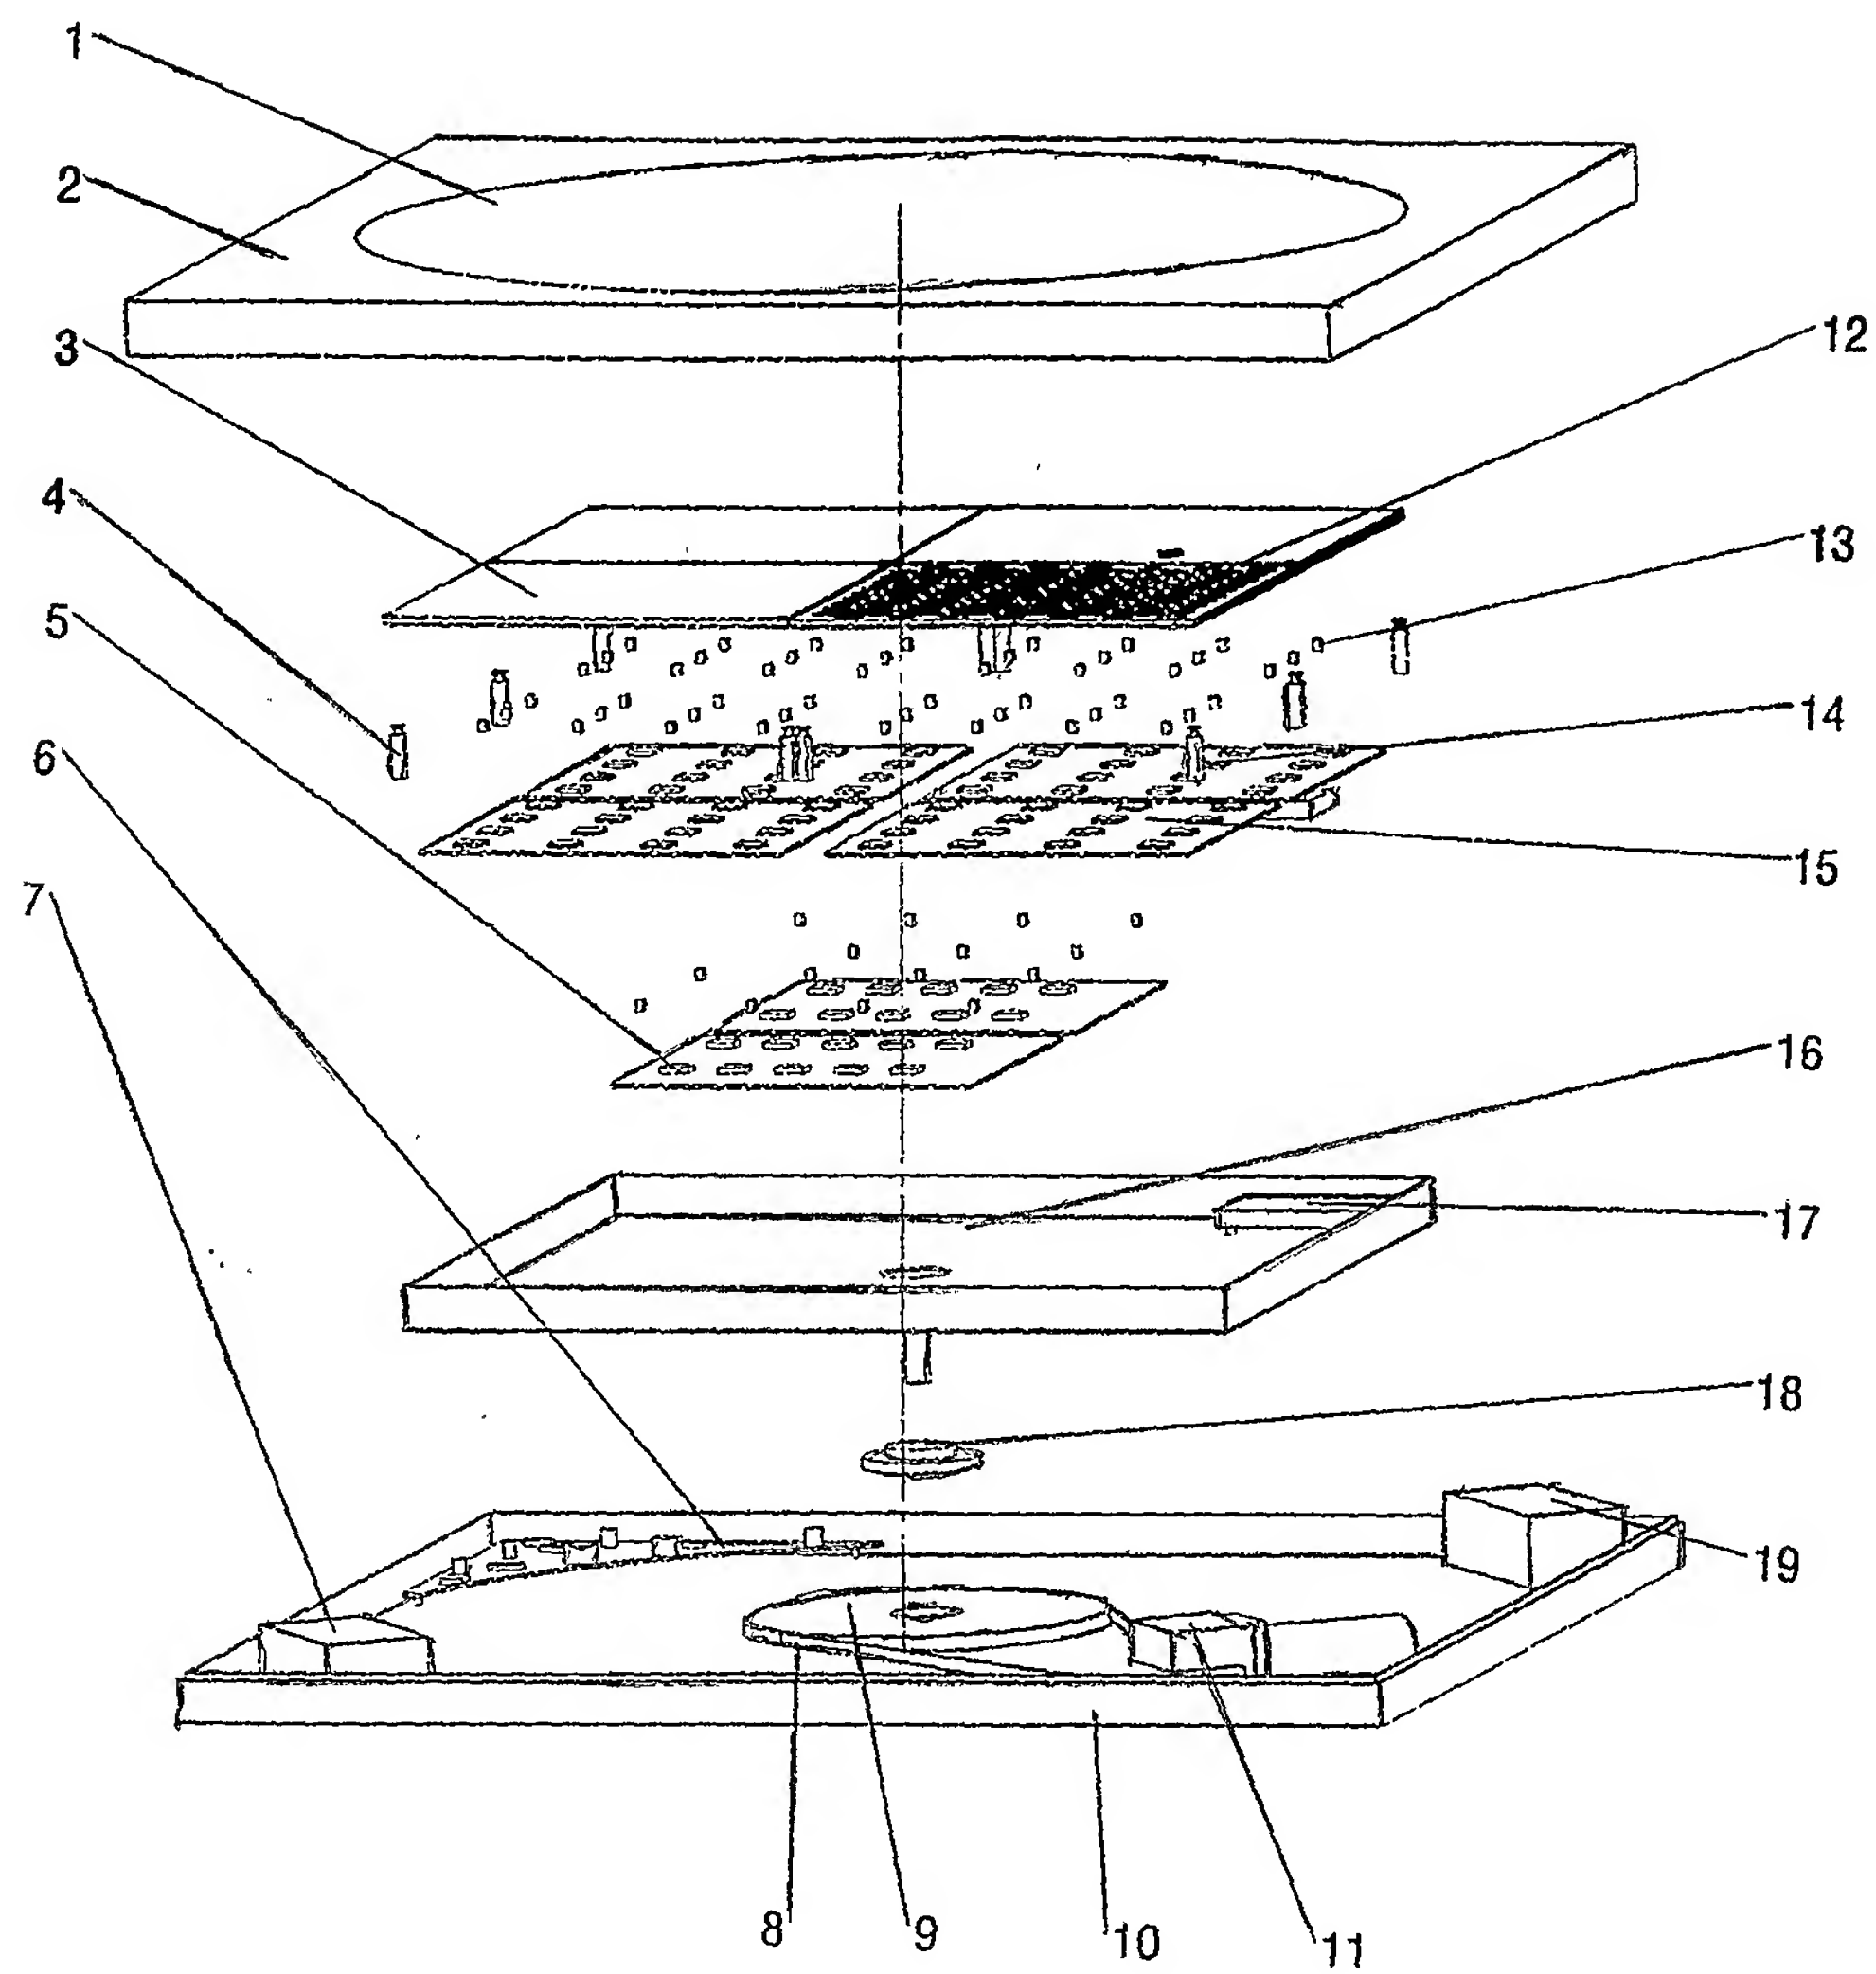

фиг. 1

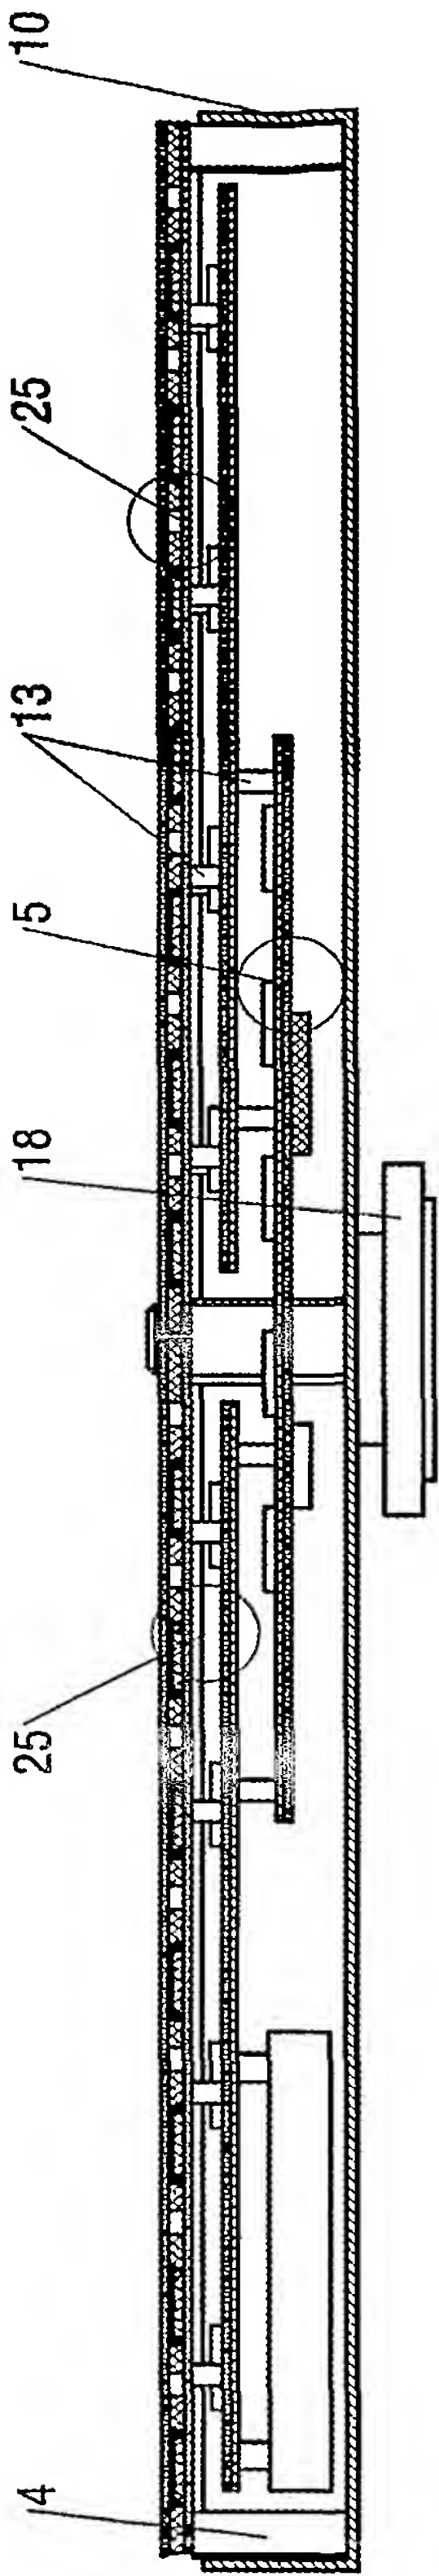


a


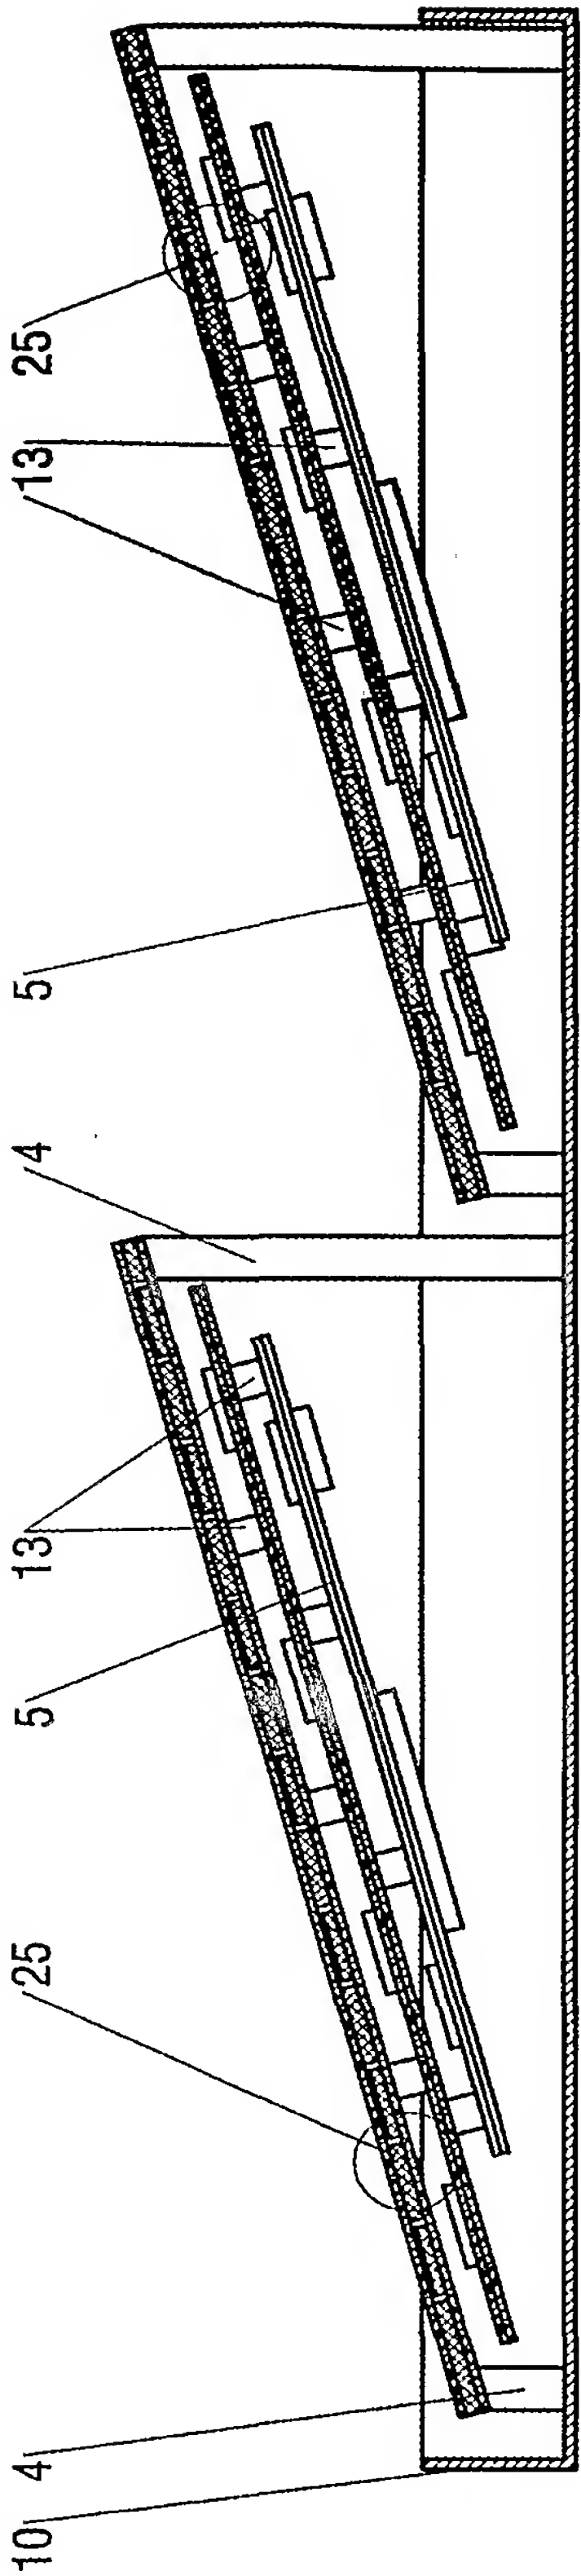


б

фиг. 2

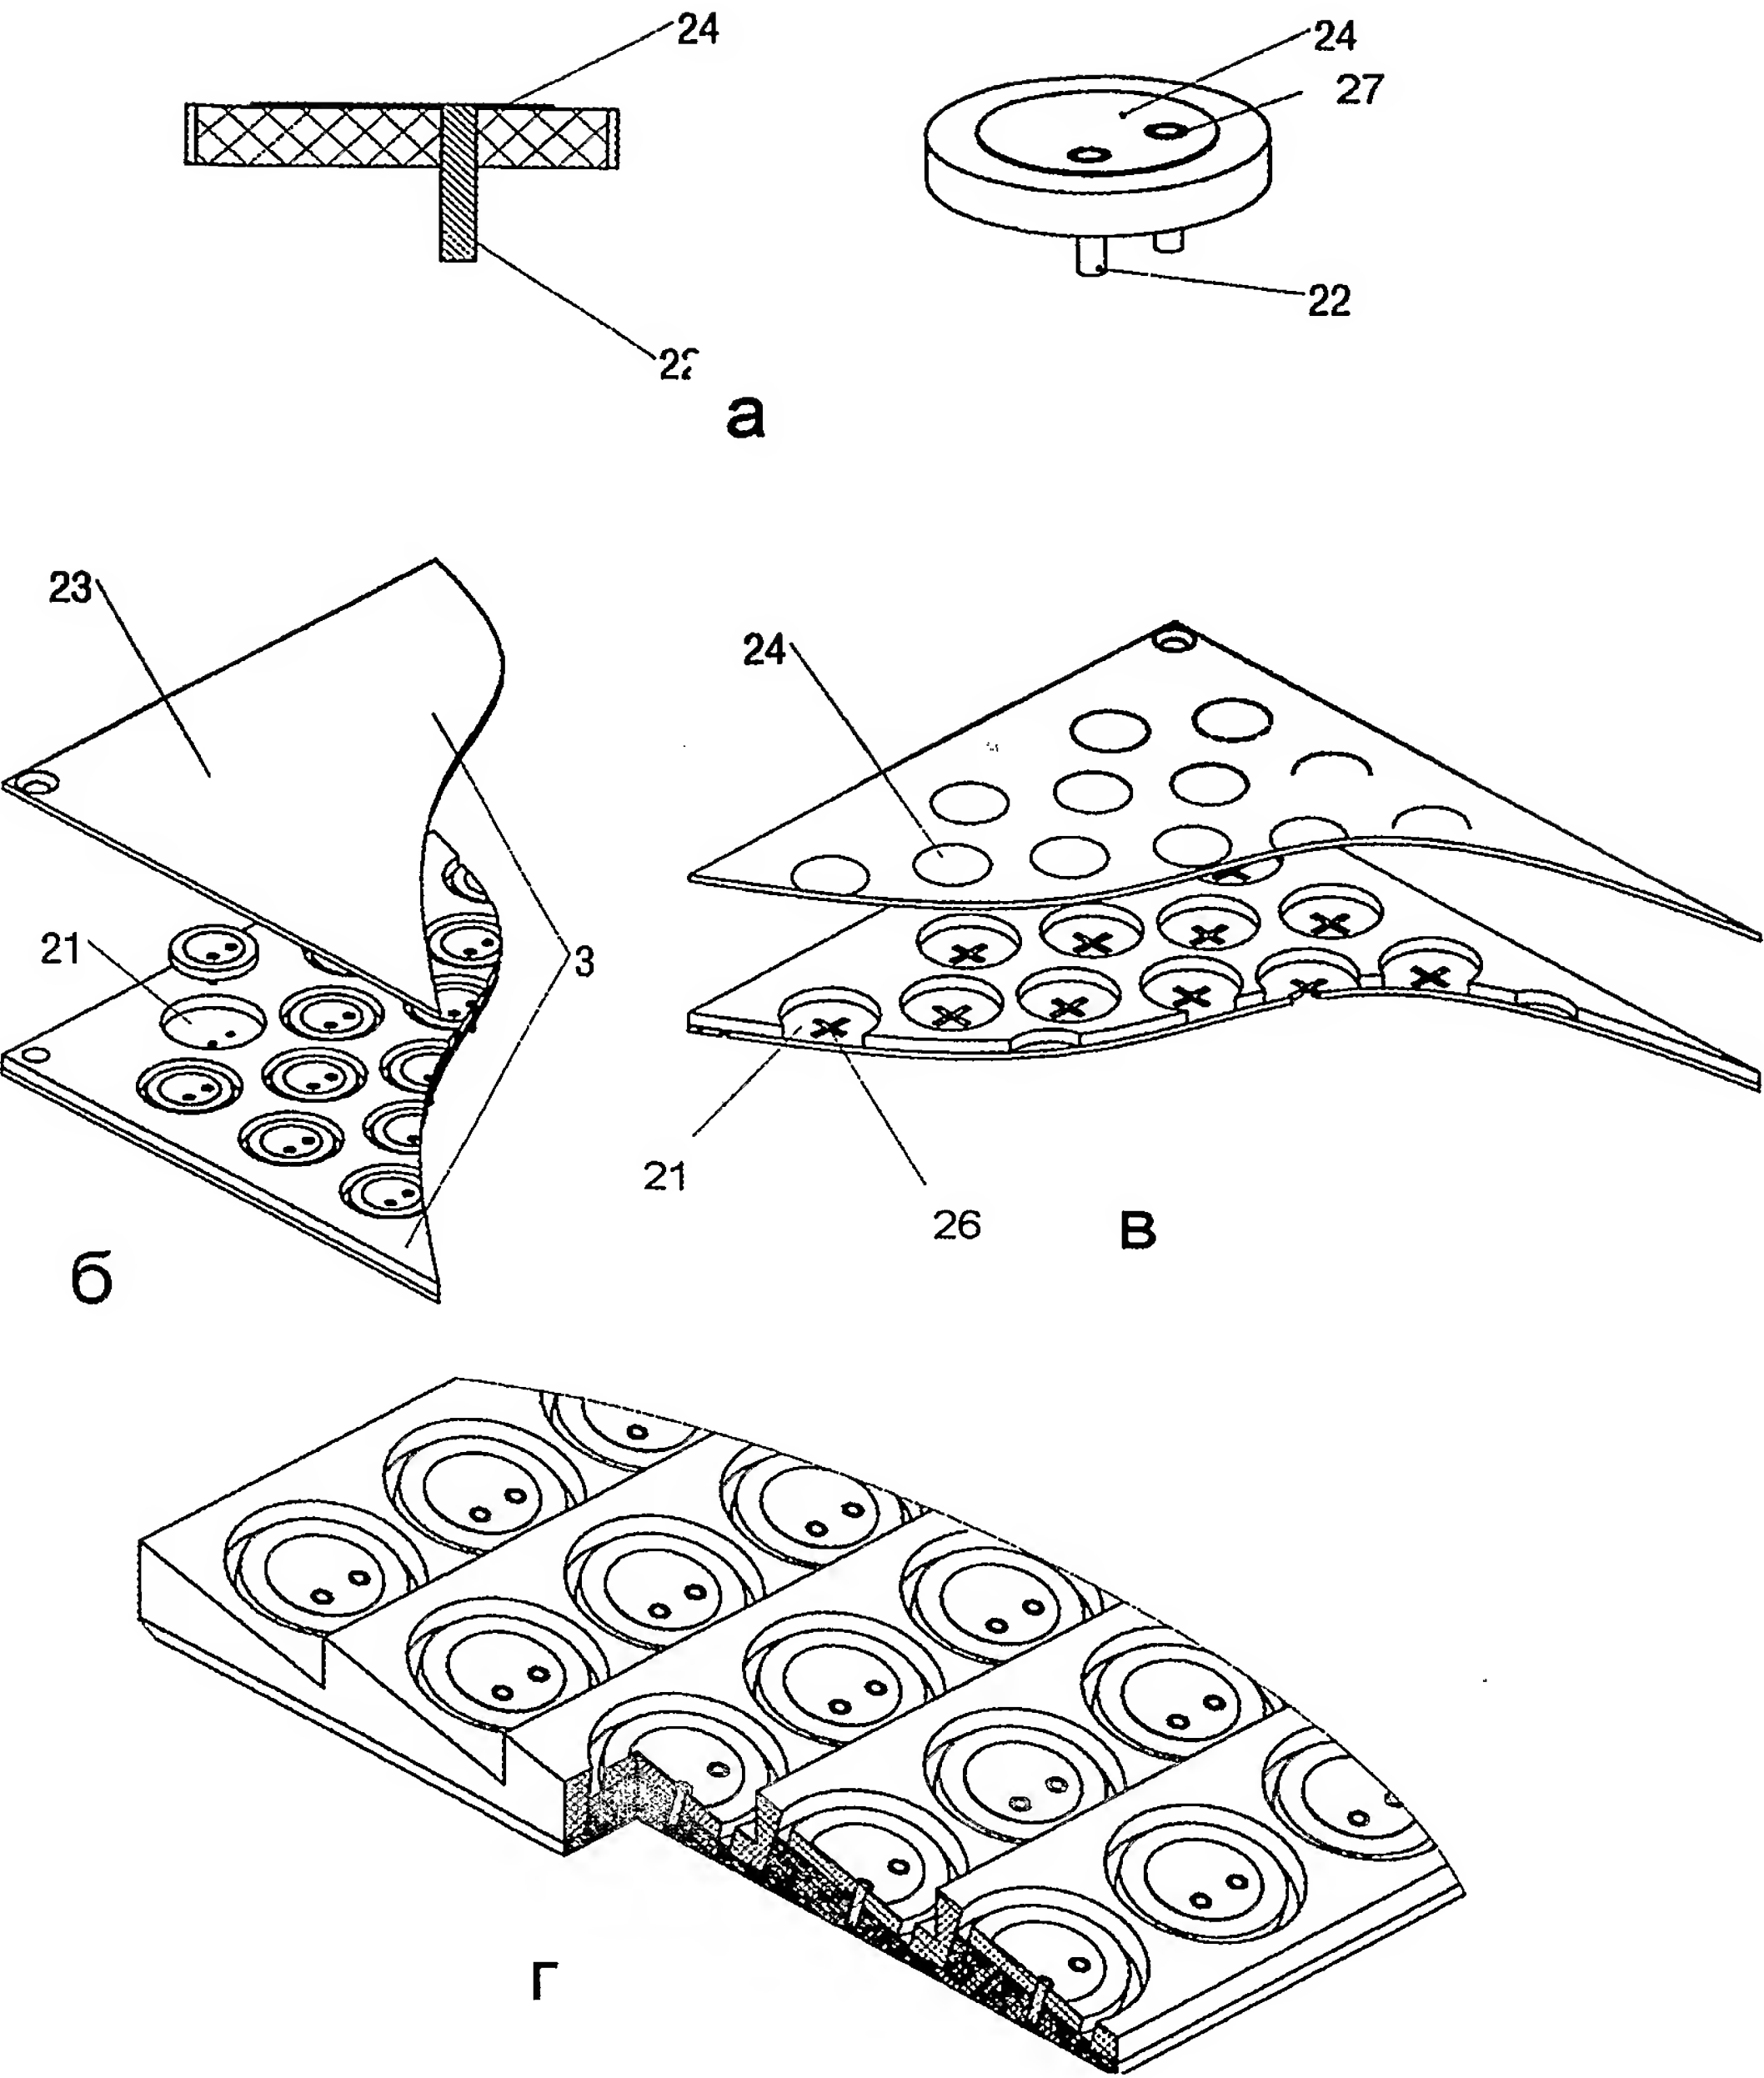


фиг. 3

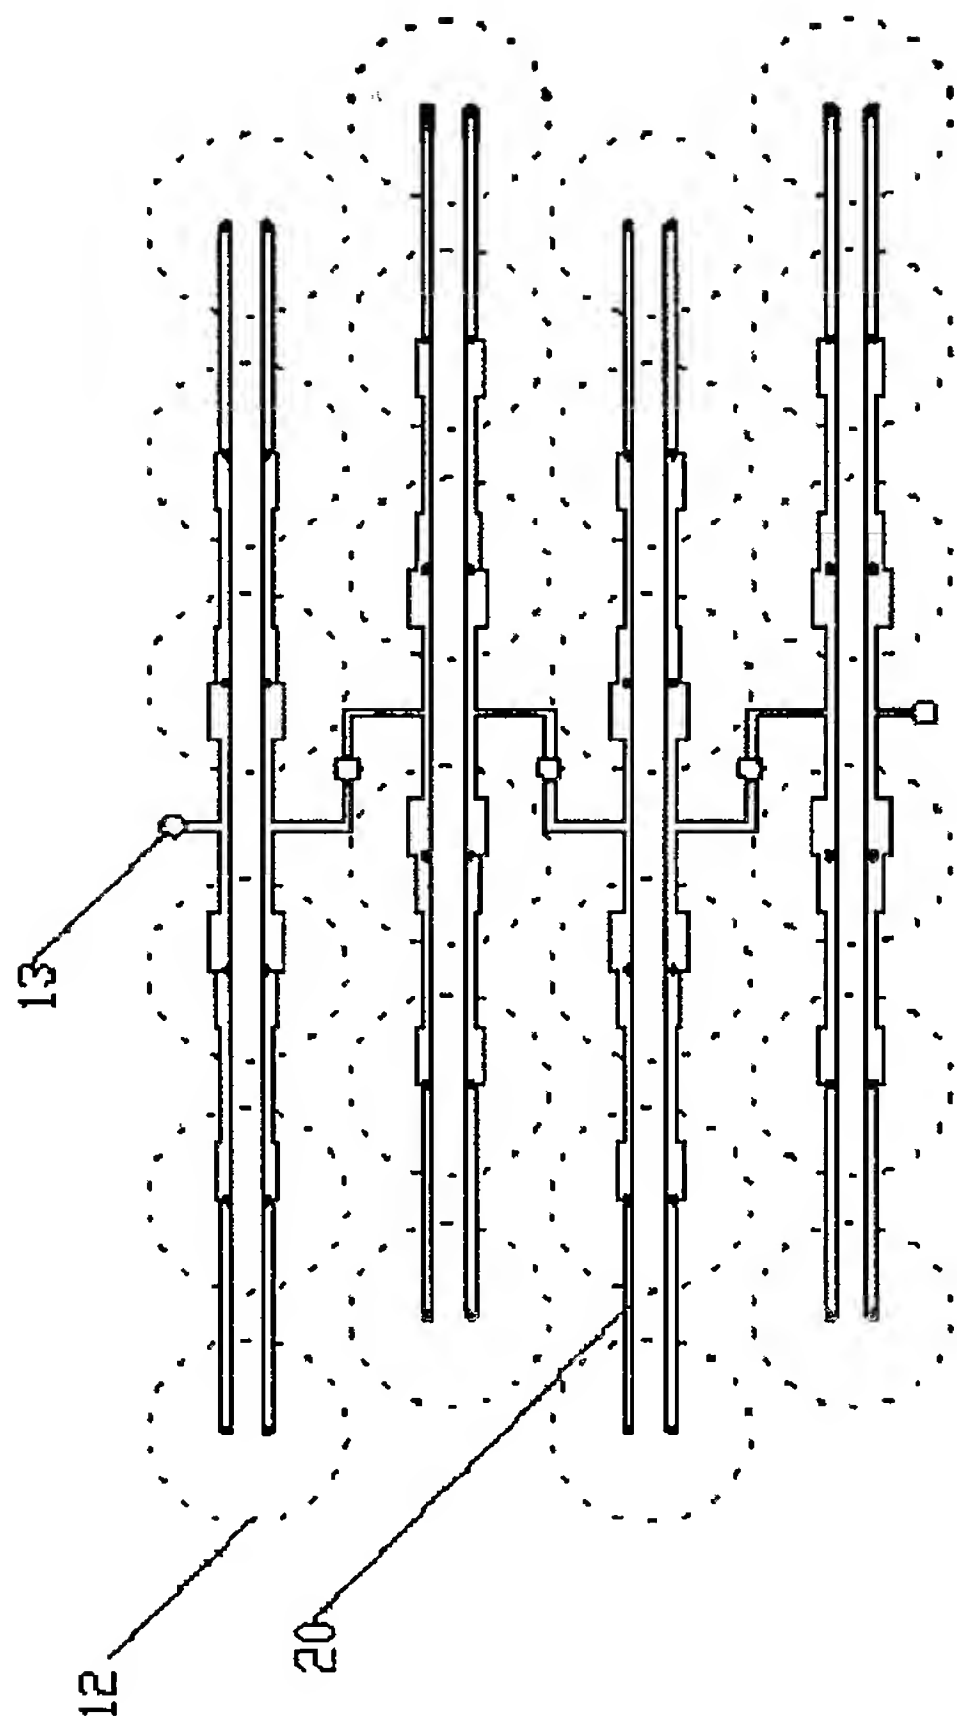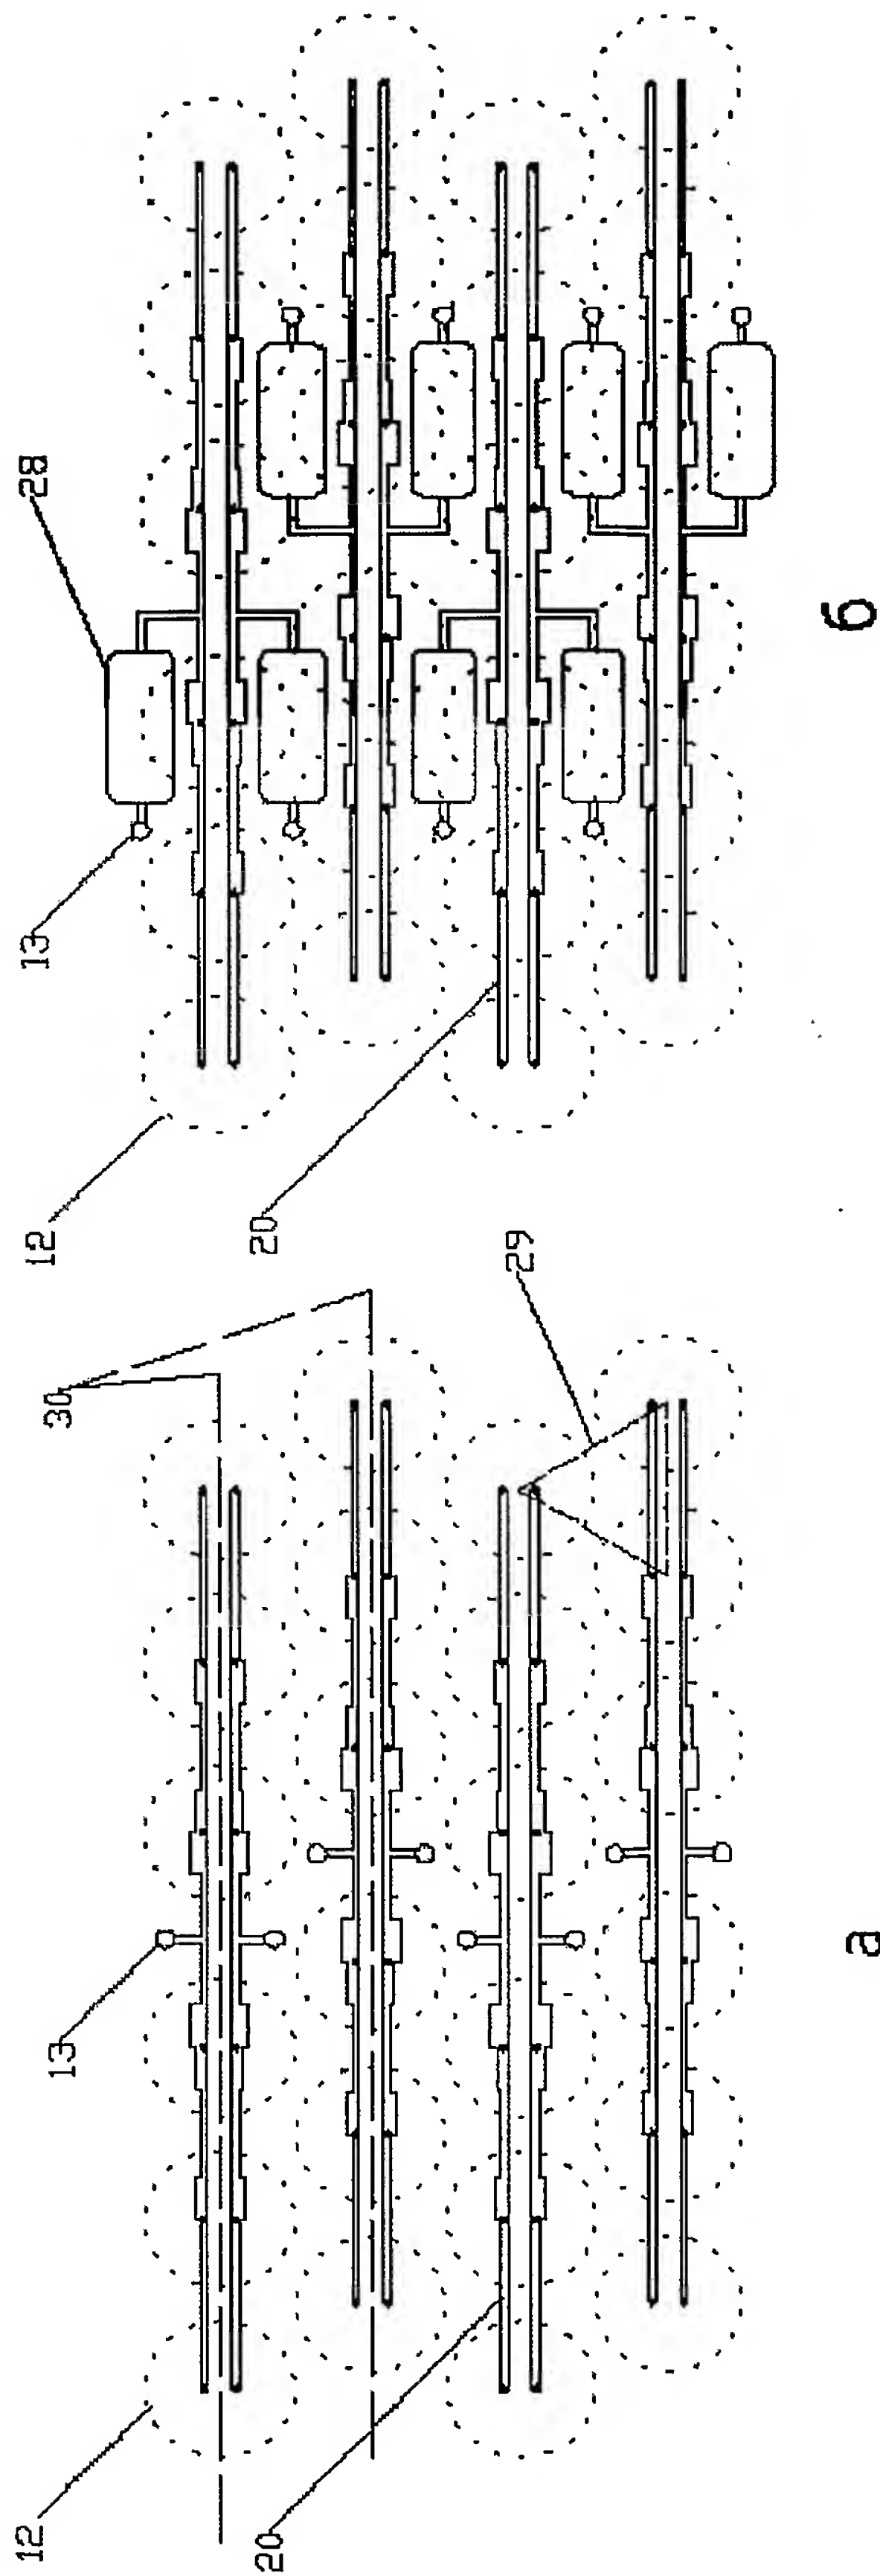


В

фиг. 4

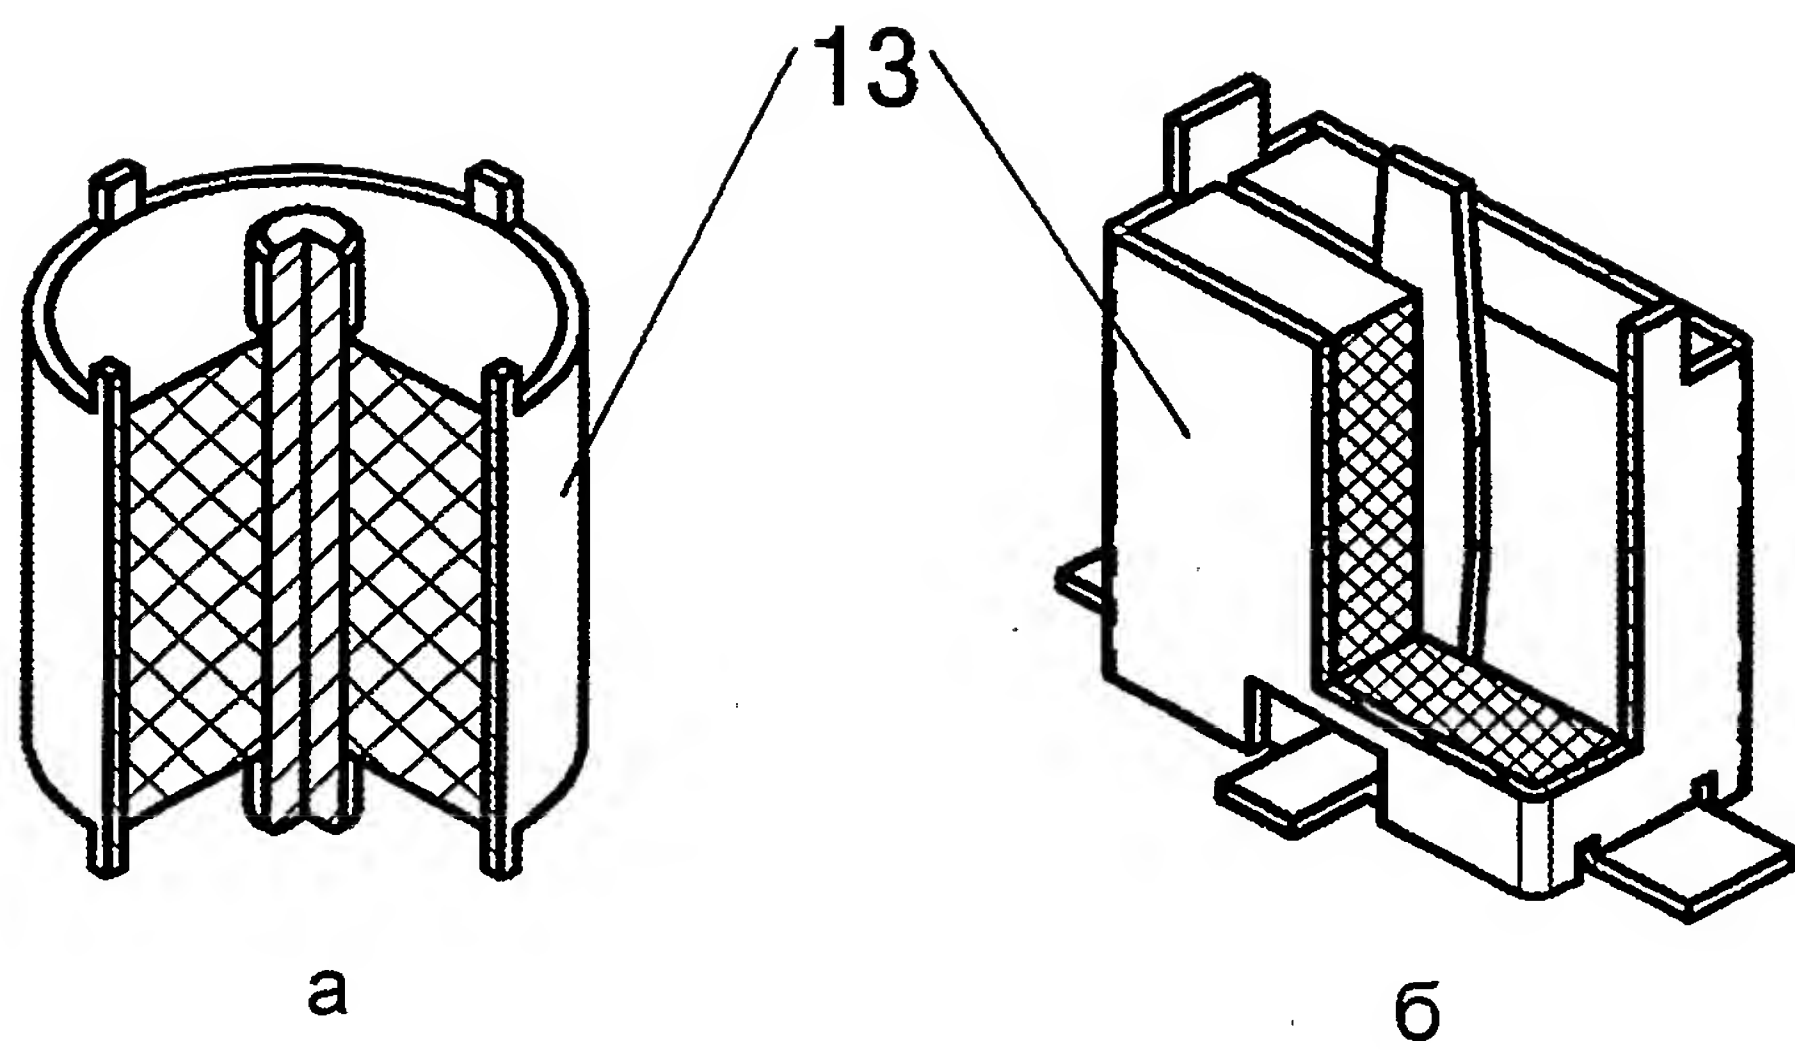

фиг. 5

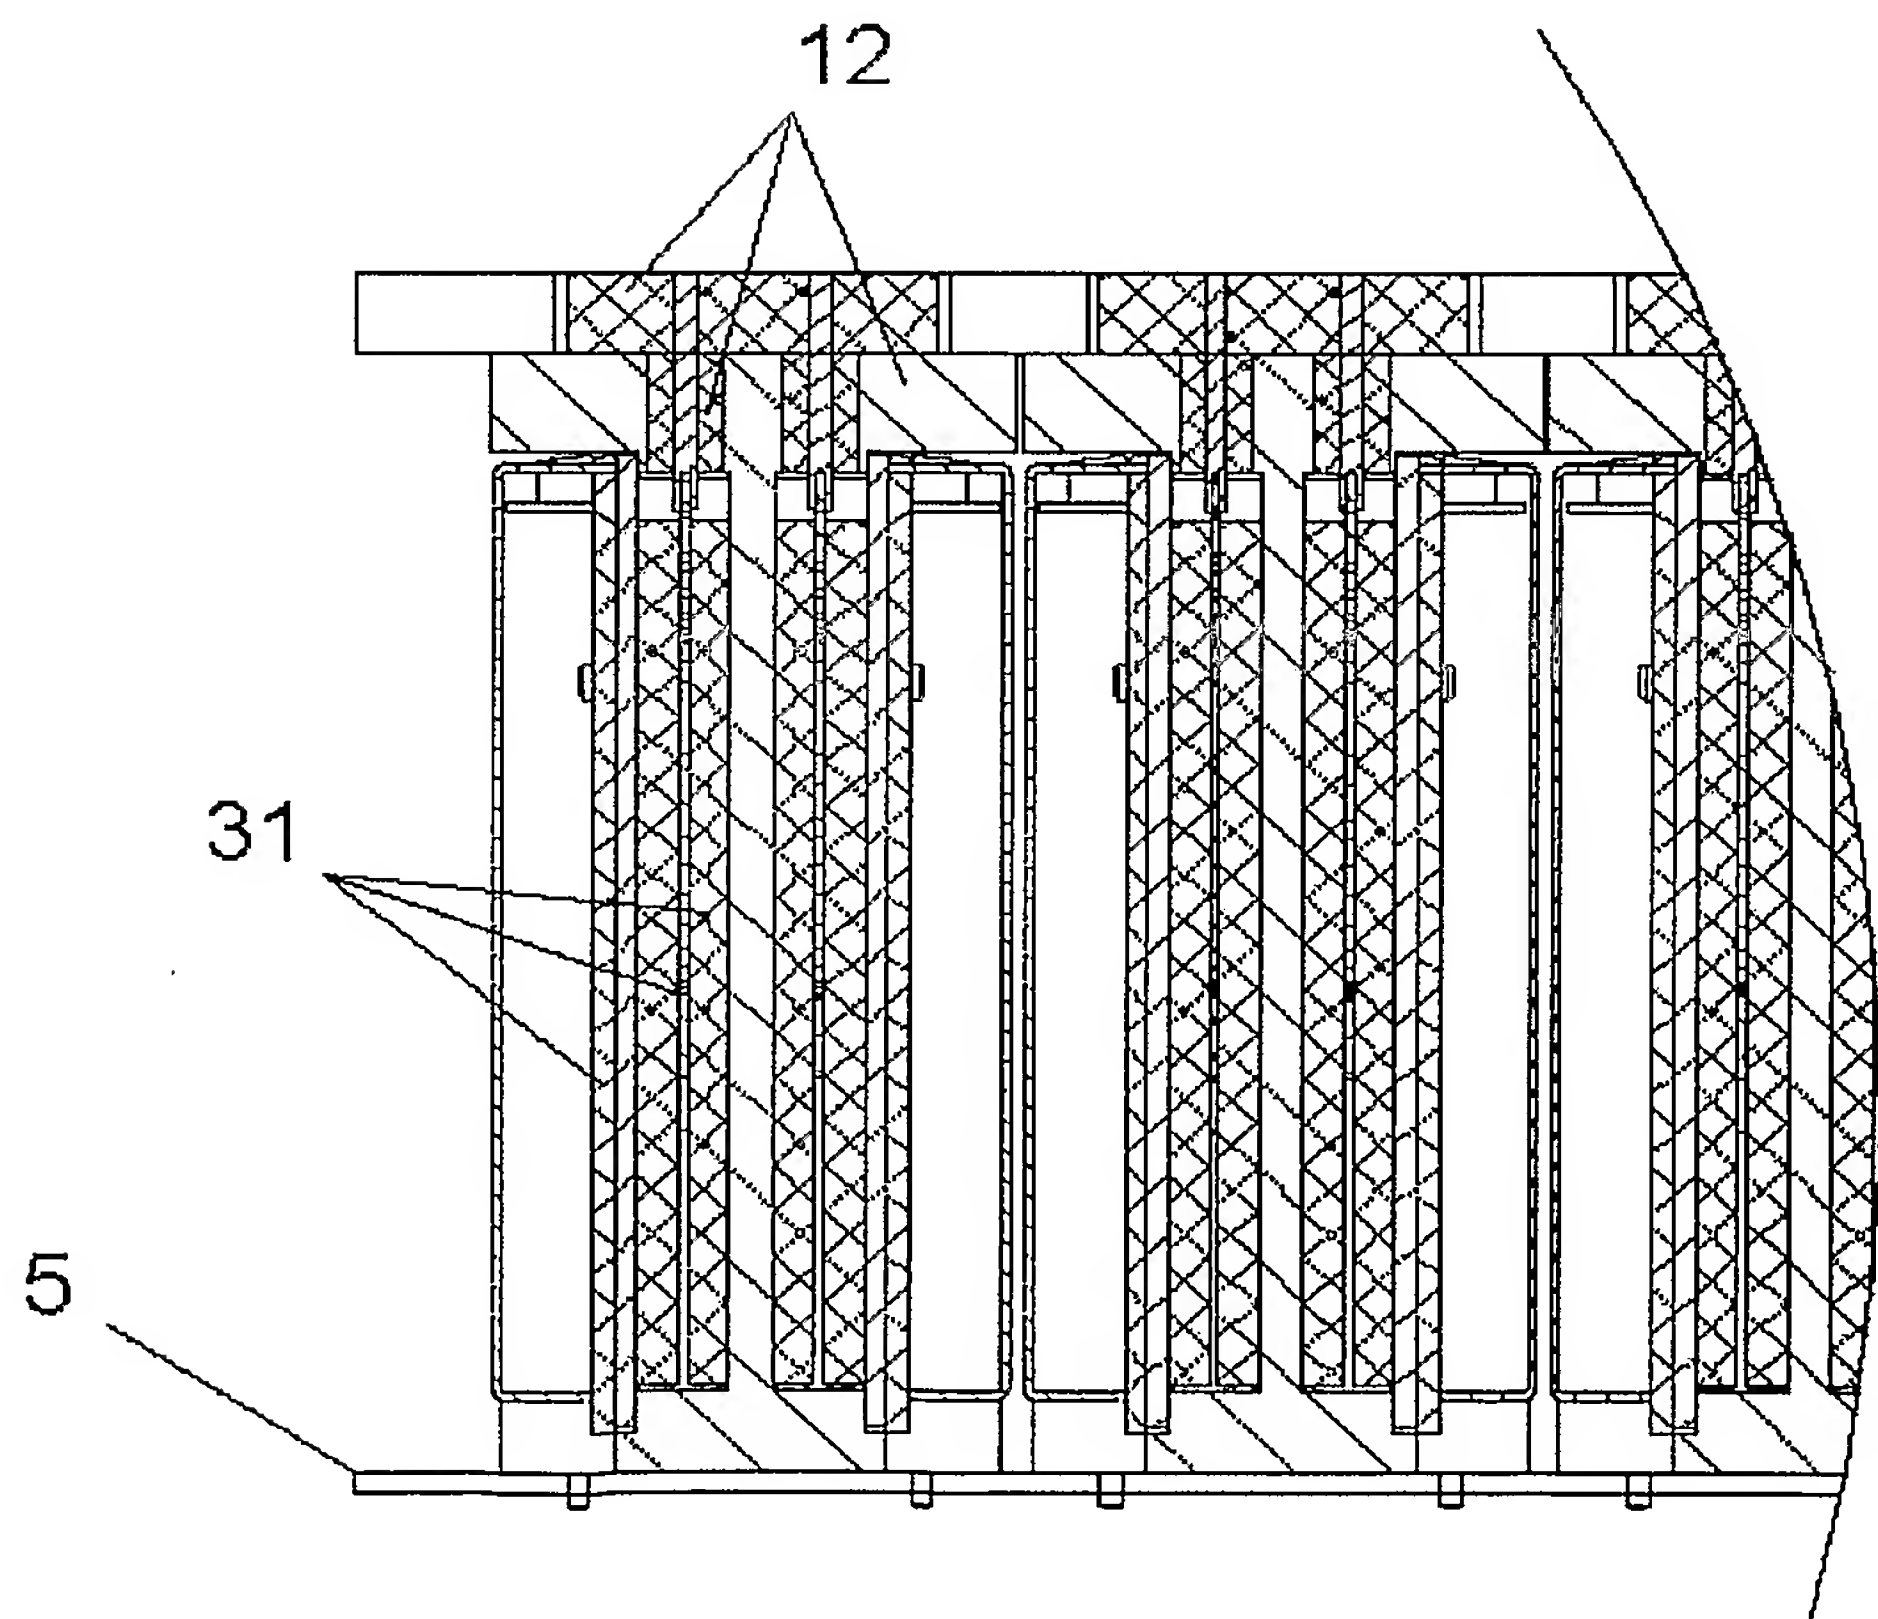

фиг. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/BG2004/000003

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01Q3/04 H01Q3/08 H01Q21/06 H01Q3/26 H01Q3/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 191 734 B1 (LEE SEONG PAL ET AL) 20 February 2001 (2001-02-20) column 7, line 33 - column 9, line 19; figures 1-5	1-50
A	SOON IK JEON ET AL: "Active phased array antenna for mobile multimedia services via satellite" 2000 IEEE AEROSPACE CONFERENCE, vol. 5, 18 March 2000 (2000-03-18), pages 165-170, XP010517164 PISCATAWAY, USA section antenna design	1
A	US 5 210 542 A (PETT TODD A ET AL) 11 May 1993 (1993-05-11) column 4, line 42 - column 9, line 34; figures 2,3	1-50
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

15 July 2004

Date of mailing of the international search report

27/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, G

International Application No
PCT/BG2004/000003

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 886 336 A (HUGHES ELECTRONICS CORP) 23 December 1998 (1998-12-23) column 3, line 15 - column 4, line 21; figures 1-3 -----	1-50
A	EP 0 301 580 A (SONY CORP) 1 February 1989 (1989-02-01) abstract; figure 21 -----	1-50
A	WO 99/66594 A (FAN HAIJUAN ; XIAO LIMENG (CN); ZHUANG KUNJIE (CN); LIU ZHIJUN (CN)) 23 December 1999 (1999-12-23) abstract; figure 1 -----	1-50

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BG2004/000003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6191734	B1	20-02-2001	KR 2000060658 A	16-10-2000
US 5210542	A	11-05-1993	CA 2071325 A1	04-01-1993
			EP 0521377 A2	07-01-1993
			JP 5218729 A	27-08-1993
EP 0886336	A	23-12-1998	US 5880694 A	09-03-1999
			CA 2240029 A1	18-12-1998
			DE 69818550 D1	06-11-2003
			EP 0886336 A2	23-12-1998
EP 0301580	A	01-02-1989	JP 1034002 A	03-02-1989
			JP 2785825 B2	13-08-1998
			JP 1061105 A	08-03-1989
			JP 2629197 B2	09-07-1997
			JP 1109903 A	26-04-1989
			JP 2551039 B2	06-11-1996
			JP 1155703 A	19-06-1989
			JP 1158808 A	21-06-1989
			JP 1158806 A	21-06-1989
			JP 1160102 A	23-06-1989
			AU 611174 B2	06-06-1991
			AU 1916788 A	02-02-1989
			CA 1311555 C	15-12-1992
			CN 1031159 A ,B	15-02-1989
			DE 3889027 D1	19-05-1994
			DE 3889027 T2	21-07-1994
			EP 0301580 A2	01-02-1989
			KR 9702682 B1	08-03-1997
			US 5087920 A	11-02-1992
WO 9966594	A	23-12-1999	CN 2329091 U	14-07-1999
			AU 4255399 A	05-01-2000
			WO 9966594 A1	23-12-1999